



GatorFLO®

Go With the Flow.
GatorFLO®

**MULTI-
PURPOSE**



SEAMLESS




**SHOCK-
ABSORBING**

A non-porous flooring solution with seamless uniformity and fatigue-reducing properties,

GatorFLO® is a safe and comfortable surface that is easy to maintain. Additionally, the high content of recycled materials makes GatorFLO® the sustainable flooring choice.

GatorFLO® is the optimal surface for your running track, sport court, or specialized training facility.

With a durable wear layer that can be recoated indefinitely, you'll love your GatorFLO® for years to come. Available in a variety of colours, thicknesses and densities.

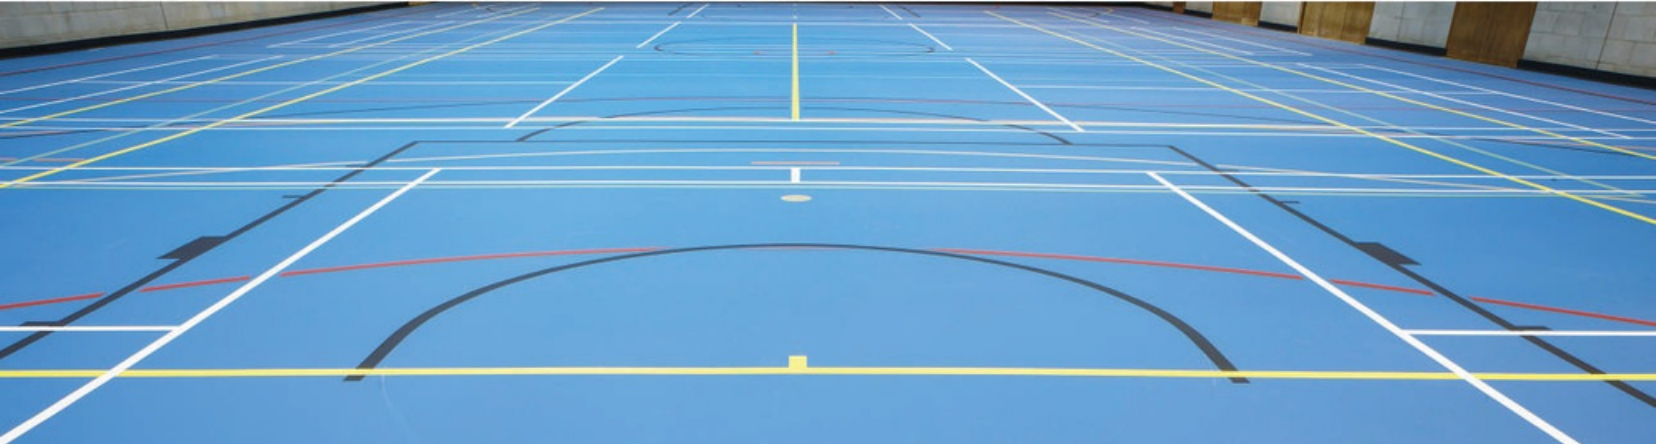

**EASY TO INSTALL OVER MOST EXISTING SURFACES,
FIELD-APPLIED LAYERS OF SELF-LEVELLING
LIQUID POLYURETHANE ARE Poured OVER
A RESILIENT RUBBER BASEMAT FOR A
BEAUTIFULLY SEAMLESS SURFACE**

GATORFLO[®] SPECIFICATIONS

PHYSICAL PROPERTIES

SURFACE HARDNESS 81 SHORE A
COATING WATER-BASED TOP COATS AND GAME LINES

SHOCK ABSORPTION (STANDARD BASEMAT)

7MM BASEMAT EN1408 28.3%
9MM BASEMAT EN1408 32.0%

COEFFICIENT OF FRICTION 0.56 DRY/0.28 WET

BALL BOUNCE EN1235 98%
IMPACT RESISTANCE EN1517 >800GR @ 10°C
RESISTANCE TO INDENTATION EN1516 0.32MM @ 5 MIN
RESISTANCE TO ROLLING LOADS EN1569 >1500 N



STATIC LOAD LIMIT 225 PSI

TENSILE STRENGTH DIN53455 3071 PSI (21N/MM²)
ELONGATION AT BREAK DIN53455 200%
TEAR STRENGTH DIN53515 294 PLI (51N/MM)



**NOTE: PHYSICAL PROPERTIES CAN VARY BY PRODUCT TYPE.
INFORMATION ABOVE APPLIES TO THIS PRODUCT ONLY.**

INDOOR PAD & POUR SURFACE COLOURS AVAILABLE



GAME LINE PAINT COLOURS AVAILABLE

